
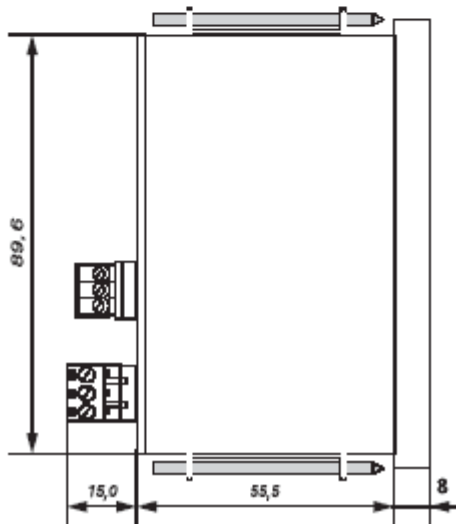
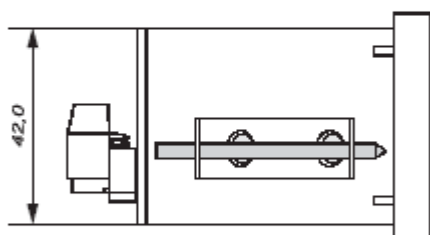
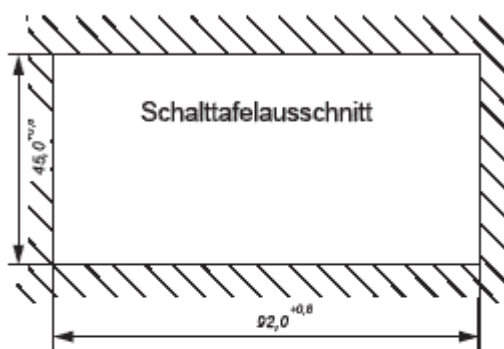


Accessories
 BDD-UM 3023
 Digital display BDD-UM 3023 for analogue
 input signals

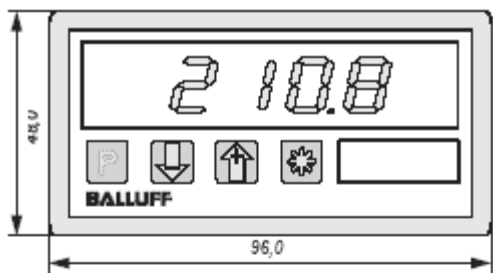

Common Data

Display 4 decades, 14 mm, red; decimal point programmable; preliminary zero suppression; - sign at negative Values

Conversion rate 5 measurements/s

Operating temperature 0 ... 60 °C

Analog input: Resolution 12 Bit

voltage 0-10 V, ± 0,05%, ± 1Digit

current 0/4-20 mA, ± 0,05%, ± 1Digit

impedance (voltage / current) > 50 kΩ / 10Ω

Power supply 24 V, ± 20 % DC (isolated)

Mechanical Data

Measurements BxHxT or DxT mm 96 x 48 x 60

Weight g 200 g

Degree of protection IP IP 54 / 20 (connection)

If not differently indicated,
 all values by IEC 947-5-2 (DIN EN60947-5-2)
 Specifications subject to change