

## Technical Specification

### Sensor Unit

Measurements	Air flow, direction and temperature	
	<b>Flow</b>	<b>Temperature</b>
Flow Units	m/sec	°C
Measurement Technique	Ultrasonic	PT100
Measurement range (typical*)	-40 to +40m/sec	-25°C to +50°C
Accuracy	+/- 0.2m/sec @ 20m/s 0.2m/s @ 20-40m/s	0.5°C
Response Time	15 Seconds	15 Seconds
Resolution	0.05m/s	
Ambient Temperature	-20°C to +50°C	
Power supply requirement	9 to 36V DC, 1% pk-pk, 20 MHz bandwidth (3VA Max) from separate power supply	
Construction	Stainless Steel 316 to IP66	

### Compliances

EMC	EN61326-1:2006 & EN50270:2006 directive compliant
Low Voltage	73/23/EEC directive compliant)

### Customer Interface

Flow Analogue outputs	1 x 4-20mA current output, 400Ω max load, range 0 to 20m/sec
Temp Analogue outputs	1 x 4-20mA current output, 400Ω max load, range -25°C to +50°C
Relay Outputs	2 x volt-free SP contacts, 50V 400mA max, for flow direction and fault condition
Communications Port	RS485 for local communication with laptop or modbus protocol

### Optional Items

Power Supply	90/264V AC, 47-63Hz, 60W 12V DC @5A (or 24V DC @ 2.5A)
Tunnel Display Unit	For local display of sensors outputs (TunnelTech 710)
Serial Data	RS485 Modbus Protocol

CODEL International LTD  
Station Building  
Station Road  
Bakewell  
Derbyshire  
DE45 1GE

Tel : +44 (0)1629 814351  
Fax : +44 (0)1629 566307  
Web : www.codel.co.uk  
email : Sales@codel.co.uk




Distributor

# CODEL

## Monitoring Solutions

### TunnelTech 303 Series - Stainless Steel Air Flow Monitor

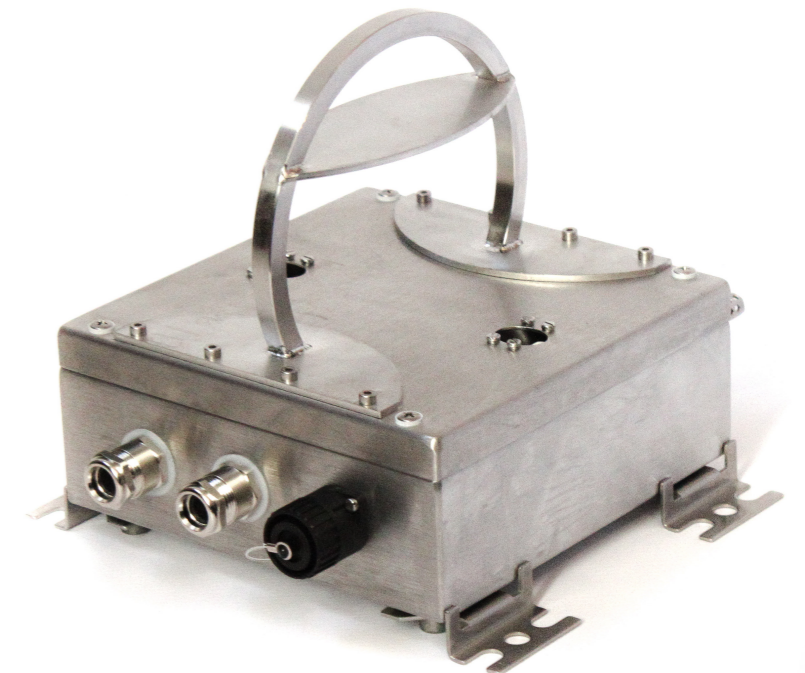

A low cost precision road & rail tunnel monitor using well-proven technology providing accurate and rapid results.

The TunnelTech 303 is an advanced technology air flow monitor developed to provide superb accuracy and reliability at a very competitive price.

Single point ultrasonic measurement technology,

Uninterrupted by traffic flow and sound reflections

No moving components providing maintenance free operation

Stainless steel construction,

Integral temperature measurement

ISO 9001:2008

Quality Certification

Monitoring Solutions



www.codel.co.uk

Doc i/d : 100286 Issue : A Rev : 1 Date : 06/10/2016 © 2010 CODEL International Ltd. We reserve the right to modify designs without prior notice

Monitoring Solutions



www.codel.co.uk

Doc i/d : 100286 Issue : A Rev : 1 Date : 06/08/2016 © 2010 CODEL International Ltd. We reserve the right to modify designs without prior notice

Designed exclusively for road and rail tunnel applications building on years of experience and proven technology.


Fully configurable analogue and alarm outputs are provided. An RS485 link can be utilised to deliver data via MODBUS protocol to a SCADA system located in the tunnel control centre.

The TunnelTech 303 Air Flow Monitor, is an essential part of any road or rail tunnel safety system. Firstly, it monitors the air flow measurement as well as the direction of flow inside the tunnel and ensures that the tunnel ventilation system provides sufficient clean air to protect tunnel users health and for drivers to clearly see the road ahead.

The TunnelTech 303 uses ultrasonic technology to ensure high accuracy and having no moving parts, reliability levels are very high and maintenance requirements are very low.

The sensor is constructed using stainless steel for ultimate protection against the harsh environments found in tunnels.

Fully configurable analogue and alarm outputs are provided. An RS485 link can be utilised to deliver data via MODBUS protocol to a SCADA system located in the tunnel control centre.

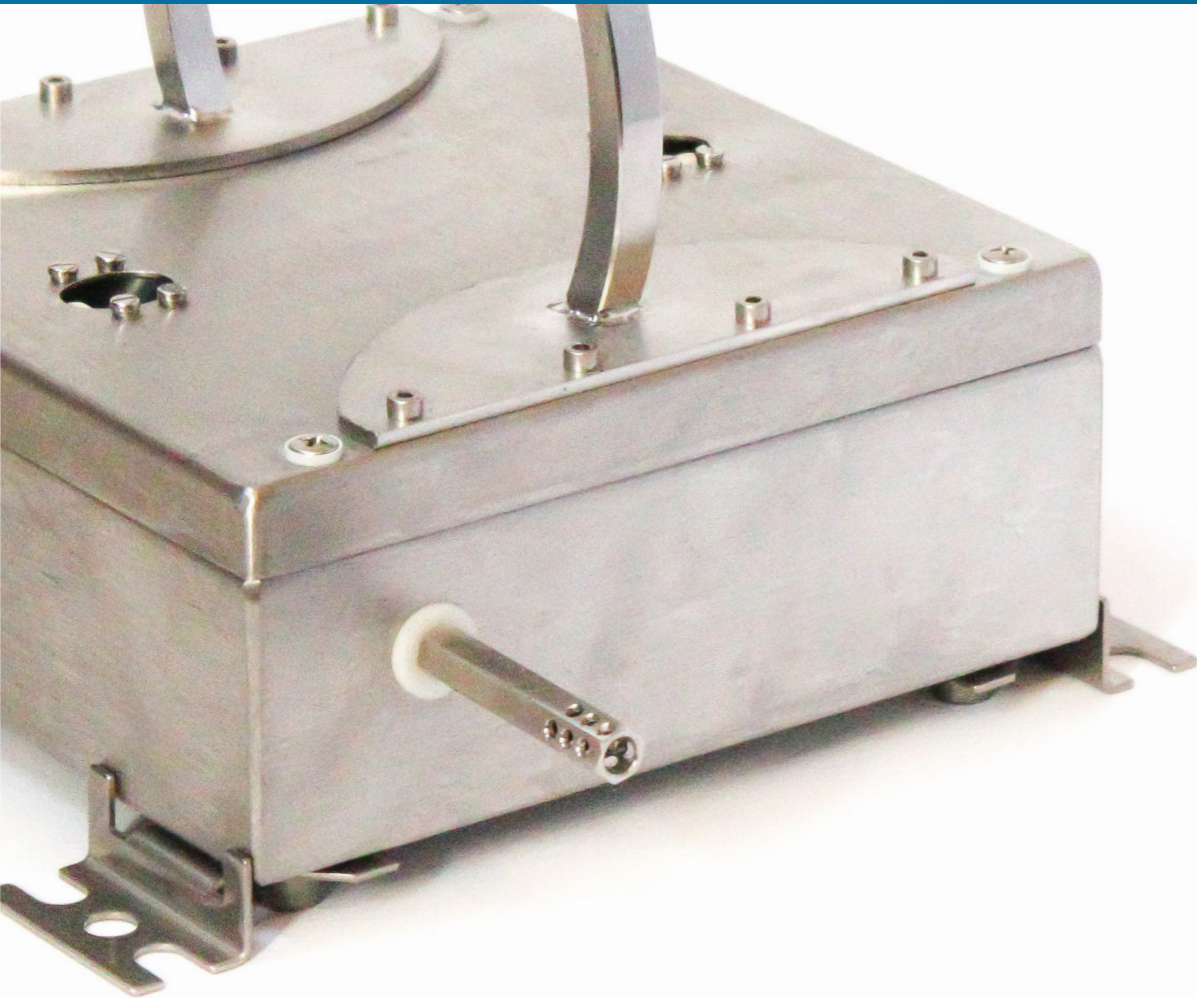

Integral temperature measurement and stainless steel construction.

The TunnelTech 303 contains no moving components and requires no routine maintenance.

