


# Z-LASER

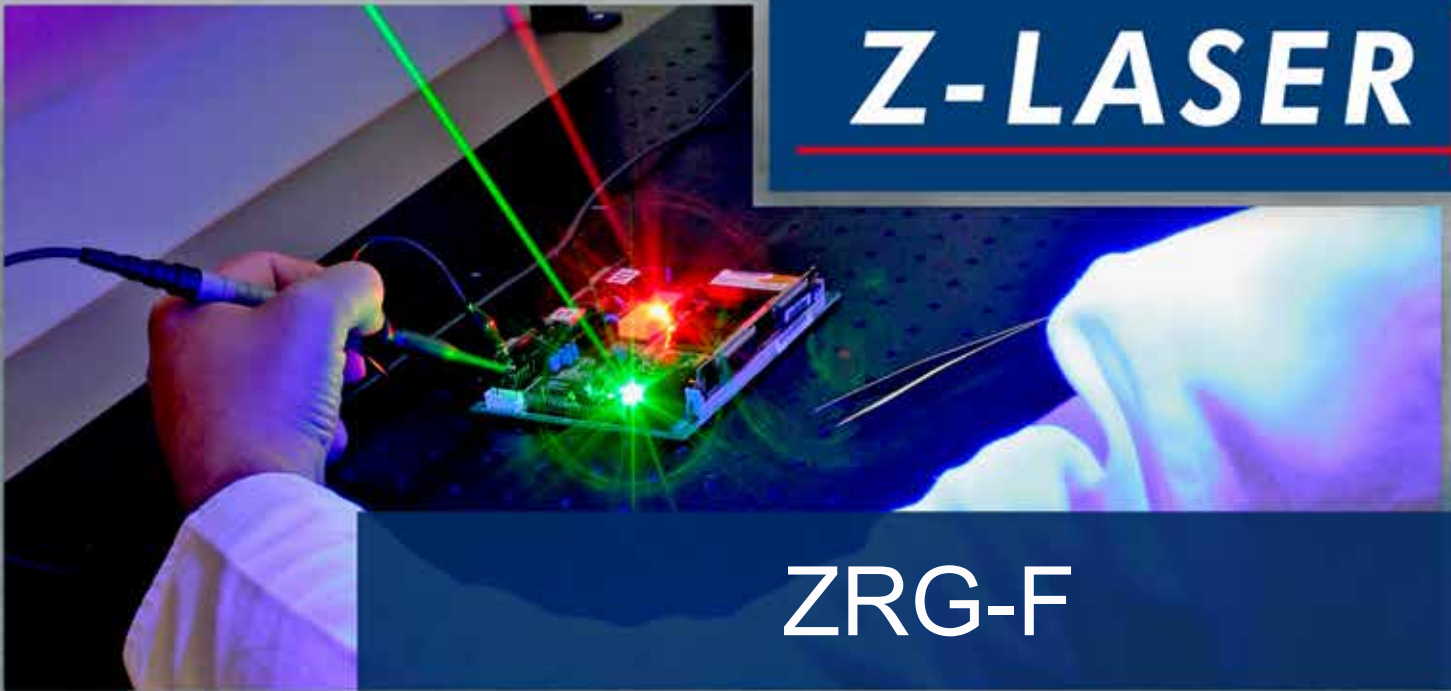

## ZRG-F

- » Green laser for long lines and best visibility
- » Optical output power up to 40mW/532nm
- » Adjustable focus
- » Large cooling ribs for optimal heat dissipation
- » Integrated wide power voltage range with high noise immunity
- » Dimensions: Ø 40mm x 329mm

Wood  
Stone  
Textile  
Metal  
Tire  
Concrete  
Food & Beverage



# ZRG-F




Mechanical specifications	
Dimensions	329mm x Ø 40mm
Housing	Aluminium, powder coated Optic head: Anodised black aluminium
IP rating	IP65
Electrical isolation	Potential-free housing
Connection	Mains plug
Electrical specifications	
Supply voltage	90 to 265VAC
Operation mode	APC with current limiting
Modulation	No
Protection	Integrated power supply with high noise immunity, Overvoltage category III, Burst & Surge resistance Level 4
Optical specifications	
Wavelength	532nm
Output power	Up to 40mW
Free focusable	Yes
Available optics	Line Gaussian, dot circular, 90° beam deflection
Environmental conditions	
Case temperature	0°C to +35°C

CE CE-Conformity according to the directives 2004/108/EC and 73/23/ECC excluding connection type.


## Accessories



## Gaussian profile

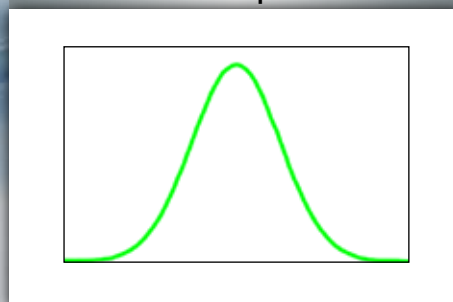

## Optics



## Order code

Z X RG - F - 532 - X  
 |            |            |            |  
 Power      F = focusable      Wavelength      Optic  
 Product family name

